

Bomba Sumergible para Aguas Residuales

CLAVE	MODELO	POTENCIA			MOTOR	ALTURA MAX. (m)	DESCARGA	FLUJO MAX. (m ³ /h)	SÓLIDOS (mm)	DIMENSIONES (mm)	PESO (kg)
		HP	KW	A							
2426	WQ130-15-11	15	11	41	230V/460V~60Hz 3F	22	6"	270	45	600x500x1290	271
2427	WQ100-25-15	20	15	55		30	4"	175	35	650x560x1230	268
2428	WQ100-30-18.5	25	18.5	65		33	4"	190	35	690x560x1230	365




EMBOBINADO DE COBRE 100%




PARA AGUA RESIDUAL Y SUCIA



MOTOR 220V~60Hz 3F
OPCIONAL 440V~60Hz 3F
CLAVE: 1699 X 10

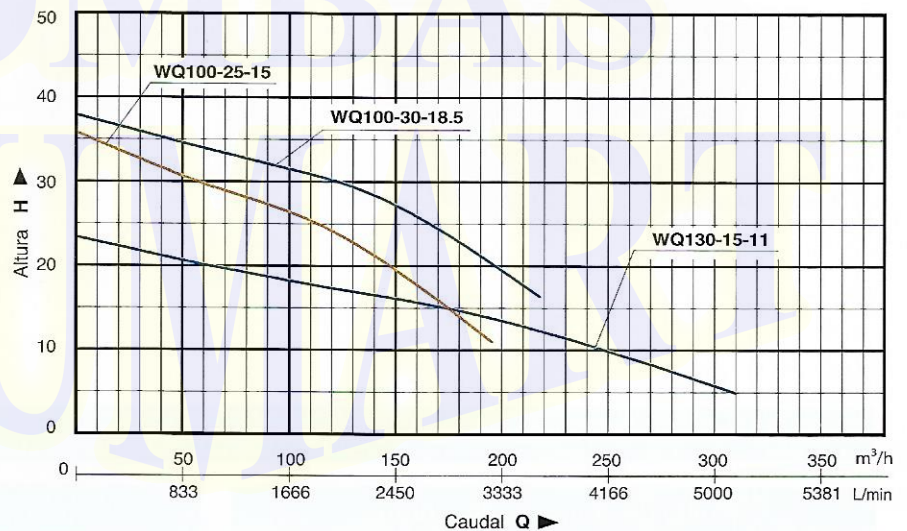

*Impulsor de doble canal.

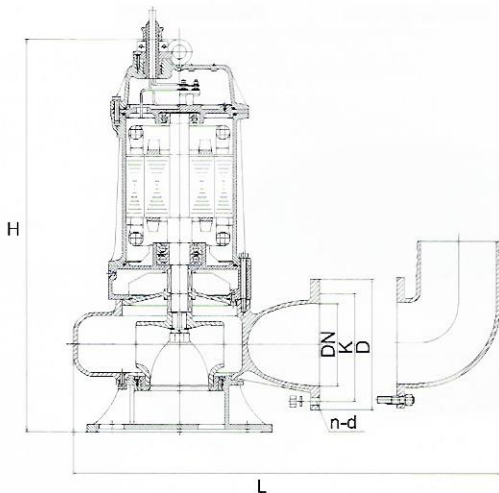

MODELO	DIMENSIONES (mm)						
	N. ETAPAS	L	H	DN	D	K	n-d
WQ100-25-15	1	710	995	100	229	190.5	8-Φ19
WQ130-15-11	1	750	995	150	280	241.5	8-Φ19
WQ100-30-18.5	1	710	995	100	229	190.5	8-Φ19